


# VIBRATION DAMPER

## ASSIGNMENT:

Vibration damper shall be screwed into an injection rail and is suitable for its fixation to motor structure or other bracket in a car. The rubber insert extinguishes vibrations so that they are not transferred from car structure to injection rail.

## CONSTRUCTION:

Two metallic nuts are joined together by vulcanized rubber the function of which is to damp vibrations. Vibration damper can stand tearing force of ca. 70 Nm.

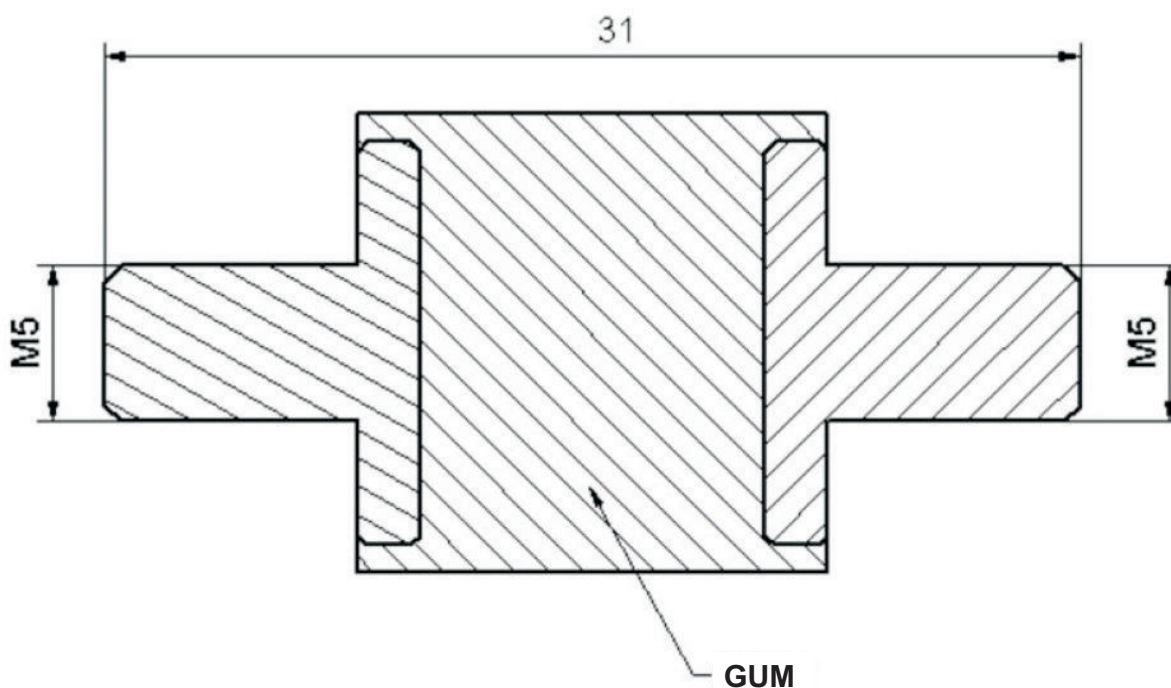

Fabryka Automatyki „FACH” Spółka Akcyjna ul. Stawowa 50, 43-400 Cieszyn  
tel.: +48 (0...33) 852 25 80 ÷ 84, fax: +48 (0...33) 852 10 85 e-mail: fach@fach.pl

Sales Department:  
Phone: +48 33 851 67 77-78 fax: +48 33 851 67 88 e-mail: marketing@fach.pl

Purchasing Department:  
phone: +48 33 851 67 80 fax: +48 33 852 10 85 e-mail: zaopatrzenie@fach.pl

